




BS-1212




BS-1290




BS-417




BS-9012




BS-9190




BS-317




BS-204




BS-203




BS-217

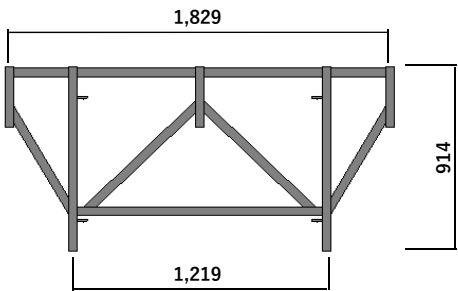

BS-1890

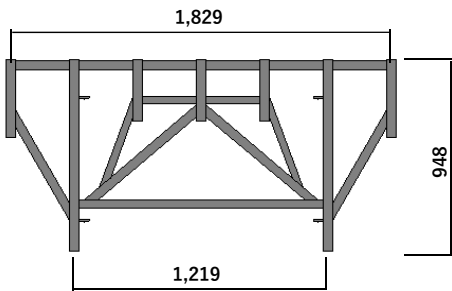



BS-1890S

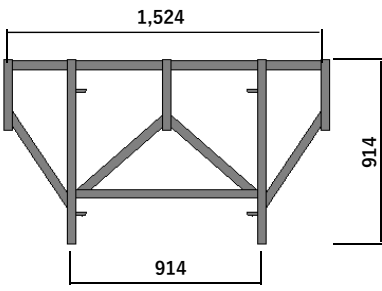


BS-1590

■ブラケット枠の許容強度の実験結果 [安全率:2以上、単位:kN/枚]


| 項 目                                                                                | 型 式 | BS-1290 | BS-1890 | BS-9112 | BS-9190 |
|------------------------------------------------------------------------------------|-----|---------|---------|---------|---------|
| 枠 幅 W (mm)                                                                         |     | 1,219   | 1,829   | 914     | 914     |
| 枠 高 H (mm)                                                                         |     | 914     | 914     | 1,219   | 914     |
| 脚柱 (P <sub>1</sub> P' <sub>1</sub> )                                               |     | 49.0    | 49.0    | 49.0    | 49.0    |
| 5点 (P <sub>1</sub> P' <sub>1</sub> P <sub>2</sub> P <sub>3</sub> P' <sub>3</sub> ) |     |         | 49.0    |         |         |
| 3点 (P <sub>1</sub> P' <sub>1</sub> P <sub>2</sub> )                                |     | 49.0    | 49.0    | 49.0    | 49.0    |
| 2点 (P <sub>1</sub> (P' <sub>1</sub> )P <sub>2</sub> )                              |     | 29.4    | 29.4    | 29.4    | 29.4    |
| 1点 (P <sub>2</sub> )                                                               |     | 24.5    | 24.5    | 24.5    | 24.5    |
| 1点 (P <sub>3</sub> P' <sub>3</sub> )                                               |     |         | 24.5    |         |         |
| 製 品 重 量 (kg)                                                                       |     | 13.5    | 19.8    | 12.7    | 10.6    |



●試験方法

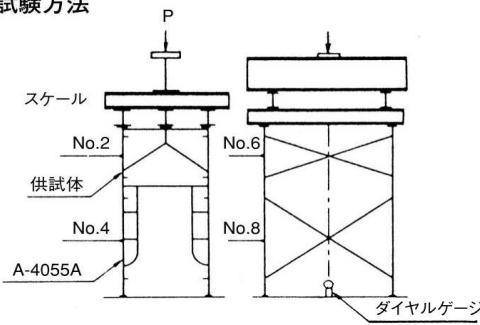


●試験方法

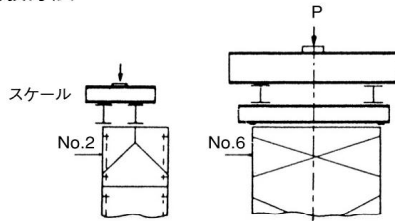


●荷重—たわみ・縮み線図


●ブラケット枠BS-1290 (1点載荷)  
Pmax 12.5Ton (1枠につき6.2Ton)

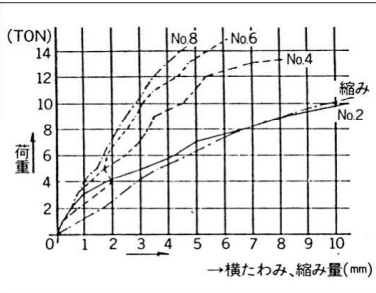


●ブラケット枠BS-9112 (1点載荷)  
Pmax 12.8Ton (1枠につき6.4Ton)

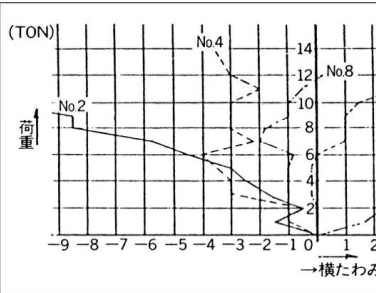


●ブラケット枠BS-9190 (1点載荷)  
Pmax 10.7Ton (1枠につき5.3Ton)

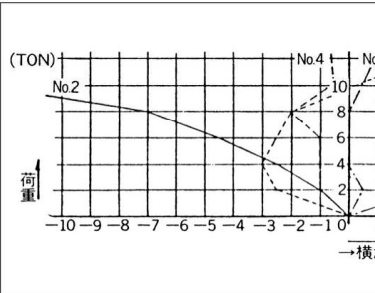


●ブラケット枠BS-1290 (2点載荷)  
Pmax 13.15Ton (1枠につき6.6Ton)

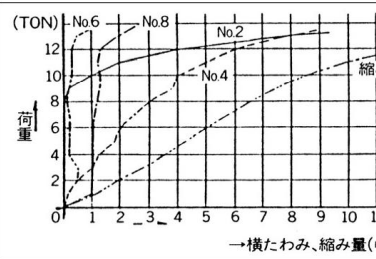


●ブラケット枠BS-9112 (2点載荷)  
Pmax 13.5Ton (1枠につき6.8Ton)

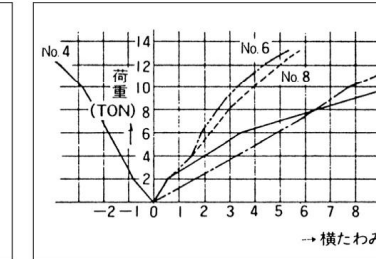


●ブラケット枠BS-9190 (2点載荷)  
Pmax 14.5Ton (1枠につき7.2Ton)

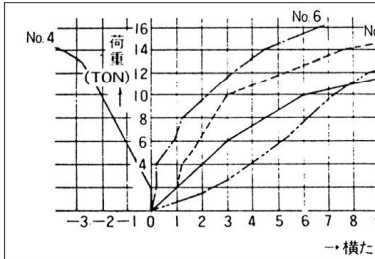

●ブラケット枠BS-1290 (3点載荷)  
Pmax 24.7Ton (1枠につき12.3Ton)

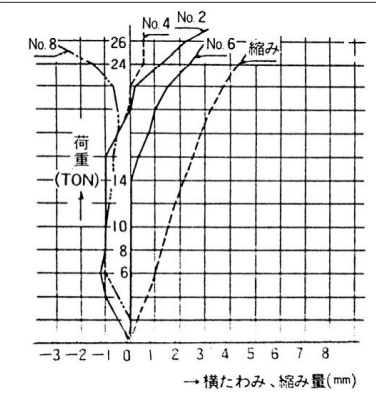

●ブラケット枠BS-9112 (3点載荷)  
Pmax 25.5Ton (1枠につき12.8Ton)

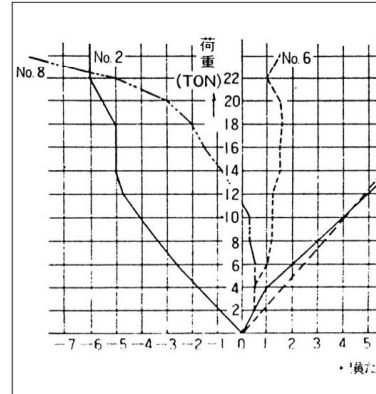

●ブラケット枠BS-9190 (3点載荷)  
Pmax 27Ton (1枠につき13.5Ton)

